

Durable Impact Traffic Doors for Food Industry and Retail





Applications

- · Food Industry (meat processing, bakeries)
- · Cold Stores
- · Retail and Supermarkets
- · Hotels and Restaurants
- · Industrial Kitchens



Global and local companies trust in us:

Food Industry

- · Kraft Foods, Bahrain
- · LSG Sky Chefs, Germany, Egypt, Italy
- · Harry Brot, Germany
- · Krones, South Africa, Ethiopia
- · Nestlé, Germany
- · Molinos, Argentina
- $\cdot \ \mathsf{Harkous} \ \mathsf{Chicken} \ \mathsf{Group}, \ \mathsf{Lebanon}$
- · Haldiram Snacks, India
- · Halwani Bros., Egypt
- · Kabbani Sweets, Saudi Arabia
- · Bright Bakery, Aruba

Retail

- · Aldi, Ireland
- · Lidl , Germany, England, Denmark, France
- · Edeka, Germany
- · Rewe, Germany
- · Countdown, New Zealand
- · Metro, Germany
- · Kaufland, Germany
- · Shoprite Checkers, South Africa
- · IKEA, Turkey
- · Iceland, United Kingdom
- · Coffeemania, Russia
- · Tchibo, Germany

Laboratory


· Bayer, Indonesia





10 benefits for Grothaus GP200 PE swing door:


- \cdot Made of solid material not breakable
- · Hygienic (EU/FDA approved)
- · Maintenance-free
- · Made to measure
- · Short production time
- · Long service life
- · 10 year guarantee on door leaves
- · Easy installation
- · Worldwide shipping
- · 100% made in Germany

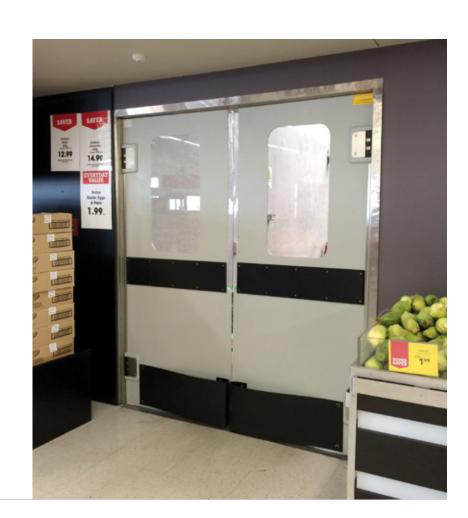




COLOURS

Standard colours in RAL

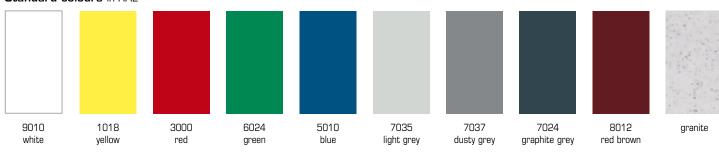

Special colour options in RAL*

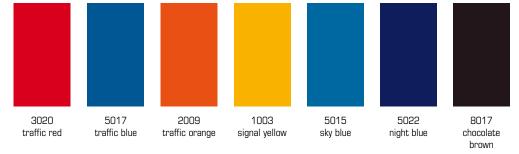


* Minimum quantities and prices on request. All RAL colours on request. Any colour deviations from the RAL scale are due to the printing process.

VISION PANELS

Standard Dimensions:

- Acrylic glass, 15 mm ($\frac{1}{2}$) frameless and flush-fitting
- Special designs on request




400 mm round (Ø 15 ¾")



400 x 600 mm (15 ¾" x 23 ½")



300 x 600 mm (11 ¾" x 23 ½")



400 x 950 mm semicircular (15 ¾" x 37 ½")

FRAMES

Installation Videos on: www.grothaus-pendeltueren.de

Mounting Profiles



Stainless steel mounting plate (1.4301)

Ready to be screwed to stone walls or steel beam



Stainless steel flat profile (1.4301)

In door height, ready to be screwed to stone wall or steel beam





Stainless steel U-profile frame (1.4301)

Edges folded for a wall thickness of 60 mm – 400 mm (2 1/4" – 15 3/4")

For easy installation to insulating panels or plasterboard




Stainless steel rectangular tube frame (1.4301)

 $100 \times 50 \text{ mm } (4" \times 2"), \text{ ready for}$ front-wall installation to stone walls or plasterboard



OPTIONS

Bumpers



Bumper made of PE 15 mm (½"), 200 mm (7 ¾") high on both sides Variable installation height



Spring bumper made of PE, 200-1200 mm (7 34"-47 14") high on both sides Variable installation height

Finger Protection



PVC finger protection combined with round edge Variants:

- round edge
- PVC finger protection in door height

Lock



Stainless steel lock
Lockable on both sides
Can be top-mounted
(single door/pair) or
side-mounted (single door)

DIMENSIONS

Special dimemsions on request

max 4600 mm (181")

min 1800 mm (70 3/4")





www.grothaus-pendeltueren.de

For more information, advice or a quote please contact us:

Phone +49 (0) 54 22.7 04 90 20 Fax +49 (0) 54 22.7 04 90 22 info@grothaus-pendeltueren.de

Grothaus Pendeltüren GmbH & Co. KG Im Gewerbepark 8 | 49326 Melle Germany